


## XOM SERIES

### P6.67 OUTDOOR LED DISPLAY

XOM series outdoor LED solutions are perfect for any billboard or large scale LED wall project. These ultra reliable, high brightness, low power consumption modules also feature an IP65 rating and auto brightness adjustment for the ultimate impact in any climate or weather conditions. Hisense LED modules include cable-less internal construction and rear access for ease of maintenance.

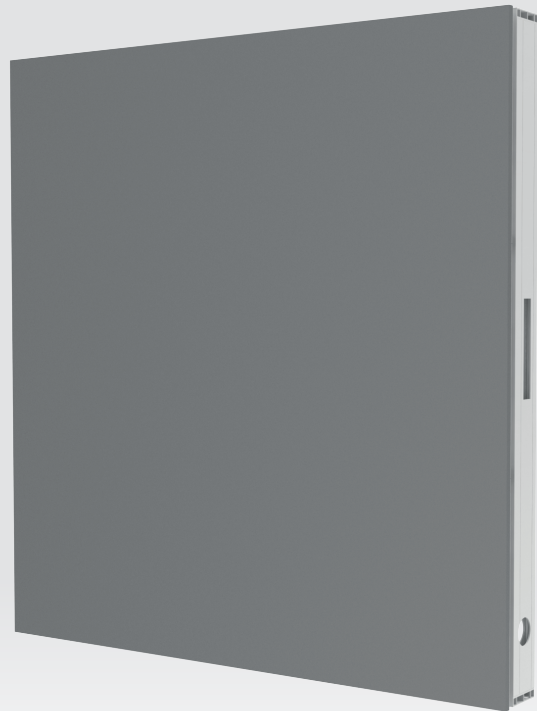

#### Highlights



##### Bright & Vivid Images

6500 nits high brightness, bright and vivid display, can be seen from a distance



##### Neat and Clean Screen

Clean cable solution, make the screen clear and beautiful.



##### 45° Beveled Edge Design

45° beveled edge design, easy to complete multiple curved surface splicing, up to -90°~90° curved surface installation.



##### EMC Anti-Interference

Complies with international electronic EMC standards. Anti-electromagnetic interference, more stable operation




##### 24kg Lightweight Design

It takes only 2 minutes to splice two cabinets together, saving labor costs dramatically.



##### Front & Rear Access

Supports front maintenance. No need to reserve space for maintenance.

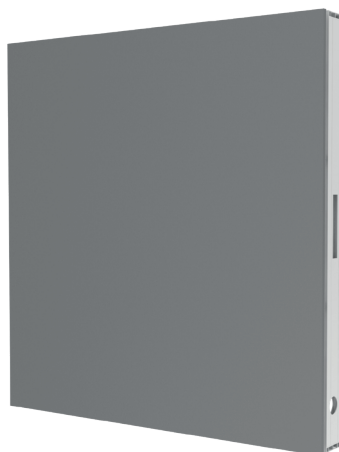

## Specifications

### XOM066A

|                               |                                   |
|-------------------------------|-----------------------------------|
| Pixel Pitch                   | 6.67                              |
| LED Package                   | SMD                               |
| LED Type                      | SMD2727                           |
| Thickness                     | 106mm / 4.17inch                  |
| Module Resolution             | 72 x 48                           |
| Module Size (WxH)             | 480 x 320mm / 18.9 x 12.6inch     |
| Cabinet Dimension (WxH)       | 960(W)x960(H) / 37.8(W) x 37.8(H) |
| Cabinet Resolution            | 144 x 144                         |
| Cabinet Weight (panel)        | ≤24kg / ≤52.91lbs                 |
| Cabinet materials             | Profile Aluminium                 |
| Brightness (Nits)             | 6500(typ.) (5000-6500 Adjustable) |
| Contrast Ratio                | ≥4000:1                           |
| Maintenance                   | Front & Rear Access               |
| IP Rating                     | Front:IP65/Rear:IP65              |
| Max Power Consumption (W/sqm) | ≤780                              |
| Avg Power Consumption (W/sqm) | ≤250                              |
| Viewing Angle (H/V)°          | ≥140 degrees / 120 degrees        |
| Refresh Rate (Hz)             | 1920~3840                         |
| Operating Environment         | From -20~60°C                     |
| Relative Humidity             | 10~90%RH                          |
| Life Span                     | ≥100,000hrs                       |

## Display Dimensions

